




ELECTRO-HYDRAULIC ACTUATORS

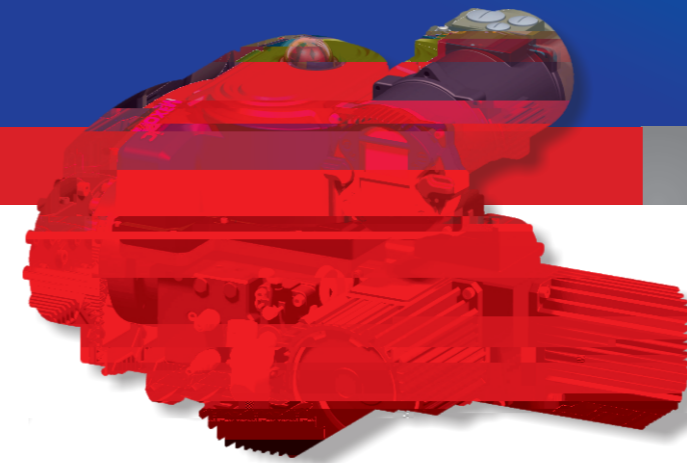

Maxonic 万讯

Maxonic 万讯

300112

深圳万讯自控股份有限公司




: 3
: 0755-86250388 : 0755-86250389

<http://www.maxonic.com.cn> E-mail: info@maxonic.com.cn

: <http://weibo.com/maxonic>

| 4000 300 112

Ver 202411

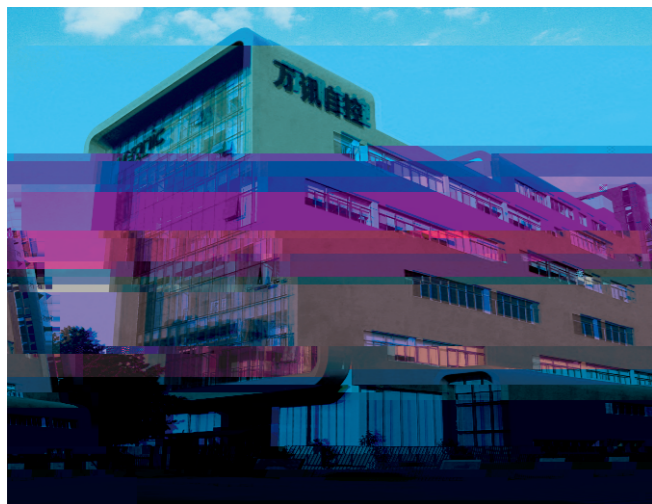

1994 2.8
A
2D/3D
"
80 1 2
IBM IPD

0-90°

MF

DCS



Profibus DP

Modbus RTU

ProfibusDP

ModbusRTU

RS485

IEC 61158 IEC

RS485

IEC 61158 IEC

61784

61784

32

4

126

支持ProfibusDP-V0, DP-V1

Đ

@

#





1

2

3

4
IP65/68, ExDb CT4Gb ExTb
CT130 Db,

5
ExDb CT4Gb ExTb CT130 Db
IP65/68,



6
50 +70

7
F 155 H
135

8

9


10



| | |
|-------------|-----------|
| EEPROM | |
| 4 | LED |
| 5 | 8 |
| 4-20mA | 220VAC/5A |
| 8 | |
| Profibus DP | |
| 1.5Mb/s | |



| |
|--|
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |



MHQ-1101-30N-00
MHL-1101-30N-110

380
380 - 110mm



1-265KNm ()
 2-200KN ()
 380VAC、50HZ、 340VAC-420VAC
 220VAC、50HZ、 200VAC-240VAC
 -20~70°C、 -50~70°C
 ≤90%
 4-20MA
 24V
 4-20MA, 8
 0.1%~1%
 0.1%~5% ()
 13MPa
 46#